

DIMENSION TRACK LOCKRING INSTRUCTIONS

Thank you for purchasing a Dimension Track Lockring!

⚠ WARNING: CYCLING CAN BE DANGEROUS. BICYCLE PRODUCTS SHOULD BE INSTALLED AND SERVICED BY A PROFESSIONAL MECHANIC. NEVER MODIFY YOUR BICYCLE OR ACCESSORIES. READ AND FOLLOW ALL PRODUCT INSTRUCTIONS AND WARNINGS INCLUDING INFORMATION ON THE MANUFACTURER'S WEBSITE. INSPECT YOUR BICYCLE BEFORE EVERY RIDE. ALWAYS WEAR A HELMET.

For additional product and safety information go to:
www.dimensionbikeproducts.com/safety

INTENDED USE & COMPATIBILITY

Dimension Lockrings are only compatible with fixed gear hubs. The threads for a lockring are a smaller diameter than those of the cog, and they tighten in a counter clockwise direction (fig. 1). This lockring is made to fit English lockring threads (1.29" x 24t LH) and will work on almost all track hubs available today except Campagnolo™ (1.32" x 24t LH) or French (33 x 1mm LH). Be sure your lockring threads are compatible.

Dimension Track Lockrings are intended for track riding use only. Any other street or road riding use is strictly prohibited and may void warranty.

TOOLS

Lockring tool

Grease

INSTALLATION

1. Once the track cog is snugly threaded onto the hub, use a chain whip to tighten it completely.
2. Apply grease to the threads. Thread the lockring onto the hub's smaller set of left-hand threads, turning it counter-clockwise to tighten until it contacts the body of the track cog. Using a lockring spanner, tighten the lockring firmly against the cog.
3. After the first ride, check the tightness of the lockring. By pedaling, you have likely further tightened the cog onto the hub. Re-tighten the lockring against the cog to safely fix the cog in place.
4. Check the tightness of the lockring periodically.

⚠ WARNING: A loose lockring will cause the cog to loosen which can damage the threads of the hub, or become disengaged resulting in a loss of control causing serious injury or even death.

LIMITED 2-YEAR WARRANTY:

Dimension warrants this new Dimension product against defects in materials and workmanship for two (2) years from the original date of retail purchase by the consumer. This limited warranty is expressly limited to the repair or replacement of the original product, at the option of Dimension, and is the sole remedy of the warranty. This limited warranty applies only to the original purchaser of the Dimension product and is not transferable.

In no event shall Dimension be liable for any loss, inconvenience or damage, whether direct, incidental or consequential or otherwise resulting from breach of any express or implied warranty or condition of merchantability, fitness for a particular purpose, or otherwise with respect to this product except as set forth herein. This warranty gives the consumer specific legal rights, and those rights and other rights may vary from state to state.

This warranty does not cover the following:

- Damage due to improper assembly or follow-up maintenance or lack of skill, competence or experience of the end user
- Products that have been modified, neglected, used in competition or for commercial purposes, misused or abused, involved in accidents or anything other than normal use
- Damage or deterioration to the surface finish, aesthetics or appearance of the Dimension product
- Normal wear and tear
- Labor required to remove and/or refit and re-adjust the product within the bicycle assembly

TO THE EXTENT NOT PROHIBITED BY LAW, THESE WARRANTIES ARE EXCLUSIVE AND THERE ARE NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

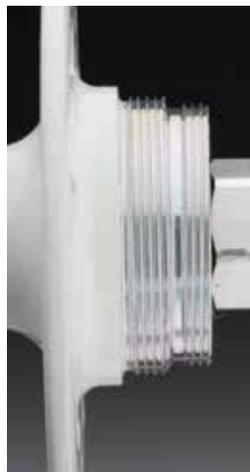


Figure 1
Track Cog & Lockring Threading

